


**Series 2, telescopic cooker hood, 60 cm, Silver metallic DFT63CA50Q**

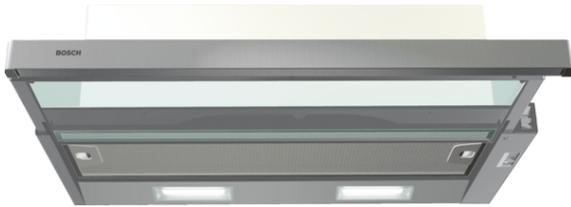

**Optional accessories**

DHZ2900 : Active carbon filter  
DWZ1IX1G9 : Wall bracket

**The telescopic cooker hood: practically disappears into your upper cabinet, giving you a sleek kitchen front.**

- Comfort of use.
- **LED-Illumination:** The energy-saving lighting provides a clear and bright illumination for the hob area.
- **Extraction rate:** ensures optimal kitchen air quality.
- **Metal Grease Filter:** cleans the air, captures grease, easy monthly clean-up.
- 3-Speed Power Level Options To Suit Your Cooking Style And Recipes

**Technical Data**

Typology : Pull-out

Length electrical supply cord : 130.0 cm

Required niche size for installation (HxWxD) : 135mm x 598.0mm x 264mm mm

Net weight : 7.2 kg

Type of control : mechanical

Number of speed settings : 3

Maximum output air extraction : 300 m<sup>3</sup>/h

Maximum output recirculating air : 220 m<sup>3</sup>/h

Number of lights : 2

Noise level : 62 dB(A) re 1pW

Diameter of air outlet : 150 mm

Grease filter material : Washable aluminium

Odour filter : No

Operating Mode : Convertible

Optional accessories : DHZ2900, DWZ1IX1G9

Total power of the lamps : 8 W

Grease filter type : Cassette

Clean filter reminders : No

Connection Rating : 181 W

Voltage : 220-240 V

Frequency : 50 Hz

Plug type : Gardy plug w/ earthing

Installation typology : Built-in

Body material : Lacquered

Plug type : Gardy plug w/ earthing

Dimensions of the product, with chimney (if exists) (in) : x x

Dimensions of the packed product : 9.84 x 25.39 x 13.97

Net weight : 16.000 lbs

Gross weight : 18.000 lbs

Motor location : Integrated motor in hood body

No-return airflow flap : No

Length electrical supply cord : 130.0 cm

Dimensions of the product, with chimney (if exists) : 175 x 600.0 x 280.0 mm

Dimensions of the packed product (HxWxD) : 250 x 645 x 355 mm

Net weight : 7.2 kg

Gross weight : 8.0 kg



4 242002 985244

**Series 2, telescopic cooker hood, 60 cm,  
Silver metallic  
DFT63CA50Q**

**The telescopic cooker hood: practically  
disappears into your upper cabinet, giving  
you a sleek kitchen front.**


---

- Suitable for ducted or re-circulated extraction
- 3 speeds
- Single motor
- Max. exhaust air flow rate according to EN 61591: 300 m<sup>3</sup>/h
- Pull-out vapour with glass
- Dimensions exhaust air (HxWxD): 175 mm -175 mm x 600 mm x 280 mm
- Dimensions recirculating installation (HxWxD): 175 mm -175 mm x 600 mm x 280 mm
- Metal grease filter, dishwasher safe
- Light Intensity: 100 lux
- Colour Temperature: 3000 K
- Noise level according to EN 60704-2-13 at max. normal use exhaust air: Noise, max. speed in normal us: 62 dB dB(A) re 1 pW
- Diameter pipe Ø 150 mm (Ø 150 mm enclosed)
- Power rating: 181 W
- Energy Efficiency Class: E (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 116.4 kWh/year
- Blower Efficiency Class: F
- Lighting Efficiency Class: D
- Grease Filtering Efficiency Class: C
- Noise min./max. Normal Level: 50/62 dB
- 2 X 4 W LED Illumination

*\* In accordance with the EU-Regulation No 65/2014*

**Series 2, telescopic cooker hood, 60 cm,  
Silver metallic  
DFT63CA50Q**

measurements in mm

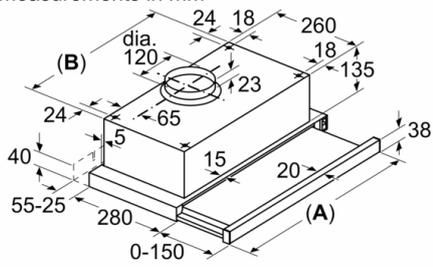

Hood Type	A	B	Hood Type	A	B
450	448	348	700	698	598
500	498	398	800	798	698
550	548	448	900	898	798
600	598	498			