

**Series 6, Canopy Extractor, 86 cm,
Stainless steel
DHL885C**



DHZ5316	Standard odor filter (replacement)
DHZ5605	Standard recirculation kit
DWZ0ITOP0	Long Life odor filter (replacement)
DWZ1IT1D1	Long Life recirculation kit external
DWZ1IX1B6	Clean Air Plus odor filter (replacement)
DWZ1IX1C6	Clean Air Plus recirc. kit external

The canopy cooker hood: offers you flexibility in your kitchen planning - mount it either on the wall or above a kitchen island.

- **silent:** maximal extractor performance with little noise
- **Intensive speed setting:** removes strong kitchen odours especially quickly and effectively.
- **Metal Grease Filter:** cleans the air, captures grease, easy monthly clean-up.

Typology: Built-in/Built-under
 Length electrical supply cord: 150.0 cm
 Min. required niche size for installation (HxWxD): 418mm x 836.0mm x 264mm mm
 Minimum distance above an electric hob: 500 mm
 Minimum distance above a gas hob:650 mm
 Net weight:9.9 kg
 Type of control:Electronic
 Number of speed settings: 3-stages + intensive setting
 Max. air extraction: 630 m³/h
 Boost position output recirculating: 639 m³/h
 Max. air recirculation: 568 m³/h
 Boost position air extraction: 730 m³/h
 Maximum Air flow:630 m³/h
 Number of lights: 2
 Noise level:65 dB(A) re 1pW
 Diameter of air outlet: 150 / 120 mm
 Grease filter material:Washable aluminium
 EAN code: 4242002824369
 Connection rating: 277 W
 Fuse protection:3 A
 Voltage: 220-240 V
 Frequency: 50 Hz
 Plug type: Gady plug w/ earthing
 Installation typology: Built-in




Series 6, Canopy Extractor, 86 cm, Stainless steel DHL885C

The canopy cooker hood: offers you flexibility in your kitchen planning - mount it either on the wall or above a kitchen island.


-
- Energy Efficiency Class: C*
 - Average Energy Consumption: 103.1 kWh/year*
 - Noise max. Normal Level: 65 dB*
 - Canopy hood
 - Suitable for ducted or recirculating operation
 - Recirc. kit or clean air kit
 - Electronic controls
 - push button controls with Electronic display
 - 3 speed + intensive operation
 - Intensive op. revert dur.: 6 min.
 - Metal grease filter with side extraction
 - Stainless steel filter covers
 - Removable metal grease filters, dishwasher safe
 - Light Intensity: 266 lux
 - Colour Temperature: 4000 K
 - Twin channel high performance fan motor
 - Extraction rate exhaust air according to EN 61591:
 - max. normal use 630 m³/h, intensive 730 m³/h
 - Dimensions exhaust air (HxWxD): 418 x 860 x 300 mm
 - Dimensions recirculating (HxWxD): 418 x 860 x 300 mm
 - built-in dimensions (HxWxD): 418 x 836 x 264 mm
 - Power rating: 277 W
 - 120 or 150 mm diameter pipe

Technical information:


**Series 6, Canopy Extractor, 86 cm,
Stainless steel
DHL885C**

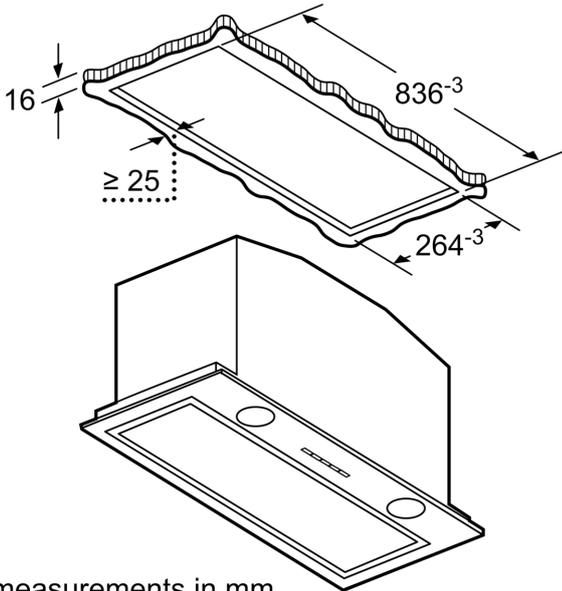

measurements in mm

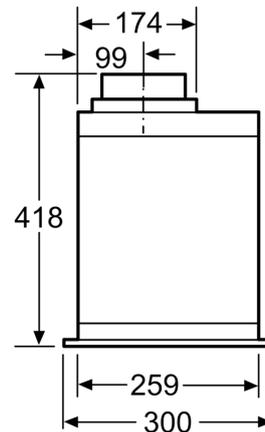


measurements in mm

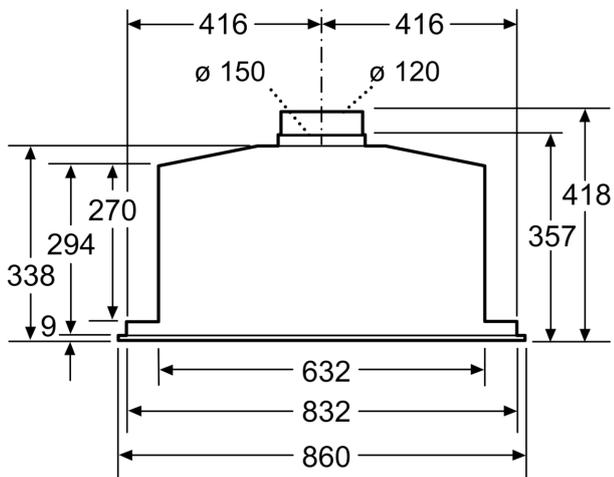

measurements in mm

Measurements in mm

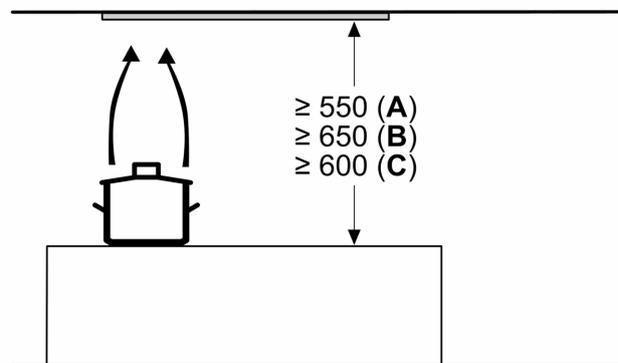

A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand