


iQ500, Gas Hob, 60 cm, Stainless steel EC6A5HC90

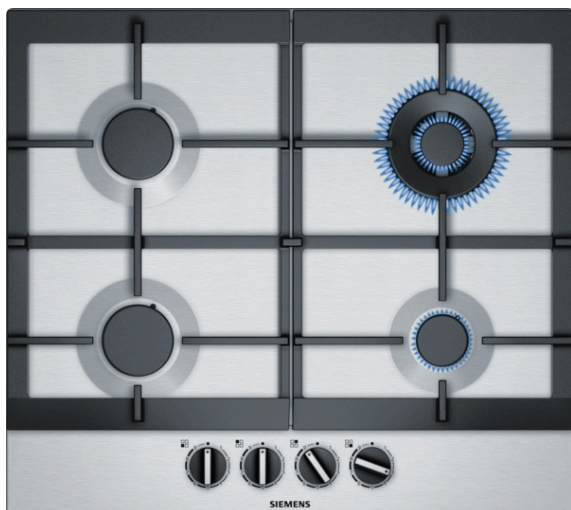

The gas hob with stepFlame Technology for precise flame control in nine steps.

- ✓ stepFlame Technology: precise heat control with nine different flame steps.
- ✓ High-quality materials and workmanship – continuous cast-iron pan supports.

Features

Technical data

Product name/family : gas hob w integrated controls
 Construction type : Built-in
 Energy input : Gas
 Total number of positions that can be used at the same time : 4
 Type of control setting devices : sword knobs
 Min. required niche size for installation (HxWxD) : 45 x 560-562 x 480-492 mm
 Width of the appliance : 582 mm
 Dimensions of the packed product (HxWxD) : 141 x 651 x 578 mm
 Net weight : 12.2 kg
 Gross weight : 13.0 kg
 Residual heat indicator : without
 Location of control panel : Hob front
 Basic surface material : Stainless steel
 Color of surface : Stainless steel
 Length electrical supply cord : 100 cm
 Knob Material : Plastic
 Sealed Burners : No
 Type of pan support : Elongated cast iron pan support
 Power of heating element (kW) : 1.75 kW
 Power of 3rd heating element (kW) : 1.75 kW
 Power of 5th heating element (kW) : 3.5 kW
 Connection Rating : 1 W
 Gas connection rating : 8000 W
 Fuse protection : 3 A
 Voltage : 220-240 V
 Frequency : 60; 50 Hz
 Main colour of product : Stainless steel
 Energy input : Gas
 Gas type : Nat gas H/E(L) 20 (25) mbar
 Alternative gas type : Liquid gas G30,31 28-30/37mbar
 Plug type : No plug (electrical connection by electrician)
 Appliance Dimensions (h x w x d) (in) : + x x
 Dimensions of the packed product : 5.55 x 22.75 x 25.62
 Net weight : 27.000 lbs
 Gross weight : 29.000 lbs
 Total number of positions that can be used at the same time : 4
 Length electrical supply cord : 100 cm
 Min. required niche size for installation (HxWxD) : 45 x 560-562 x 480-492 mm
 Dimensions of the packed product (HxWxD) : 141 x 651 x 578 mm
 Net weight : 12.2 kg
 Gross weight : 13.0 kg



iQ500, Gas Hob, 60 cm, Stainless steel EC6A5HC90

Features

Design

- Stainless steel surface
- cast iron pan support

Comfort & Convenience

- Step valve 9 steps: precisely adjust the flame in nine defined and repeatable levels.
- Sword Knobs: easily access knobs in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the knob to ignite the flame.

Burners and power

- 4 PC
- Left front: Standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: WOK burner up to 3.5 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Dimensions of the product (HxWxD mm): 53 x 582 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Connected load: 8 KW

